


TP-LINK ARCHER C6 - KONFIGURACJA ROUTERA - PPPOE


Aby rozpocząć konfigurację routera, należy uzyskać z nim połączenie, wybierając jedną z opcji:

- **połączenie przewodowe** - kabel internetowy pomiędzy gniazdem ethernet w komputerze, a portem LAN w routerze (gniazdo oznaczone kolorem żółtym),
- **Wi-Fi** - nazwa sieci bezprzewodowej (SSID) oraz domyślne hasło (Wireless Password) widnieją na naklejce na odwrocie routera.

Po połączeniu z routerem, pierwszym krokiem jest zalogowanie się do opcji konfiguracyjnej routera - należy otworzyć przeglądarkę internetową, a w polu adresowym wpisać <http://tplinkwifi.net> lub adres **192.168.0.1**.




W przypadku pierwszego logowania do konfiguracji routera, należy utworzyć hasło do konta administratora.

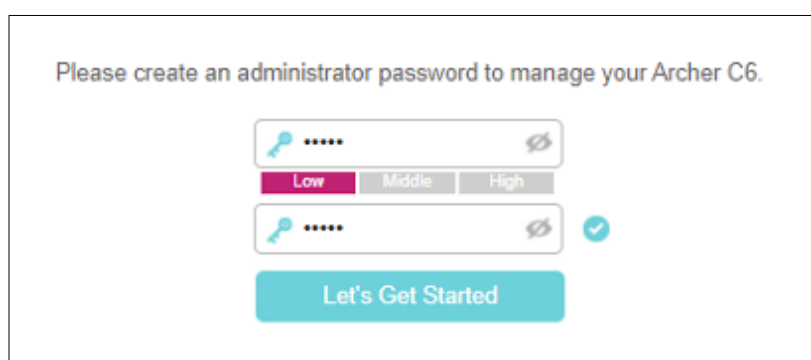
A screenshot of the TP-Link Archer C6 administrator password creation screen. The text at the top says 'Please create an administrator password to manage your Archer C6.' There are two password input fields, each with a key icon and a visibility toggle. Below the first field are three buttons labeled 'Low', 'Middle', and 'High'. The second field has a checkmark icon to its right. At the bottom is a large blue button labeled 'Let's Get Started'.

Nie mylić z danymi dostępowymi do sieci bezprzewodowej!

Jeżeli router był już wcześniej skonfigurowany, należy użyć wcześniej utworzonego hasła i zalogować się.

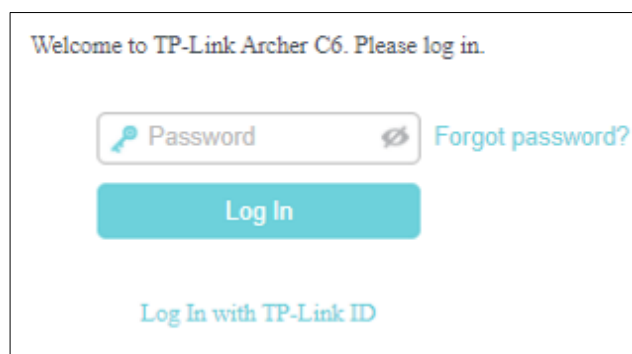

Po pomyślnym zalogowaniu, należy wykonać **Szybką konfigurację/Quick Setup**. W polu **Strefa czasowa/Time Zone** należy wybrać strefę odpowiadającą Polsce, tj. **(GMT +01:00)** i przejść dalej.

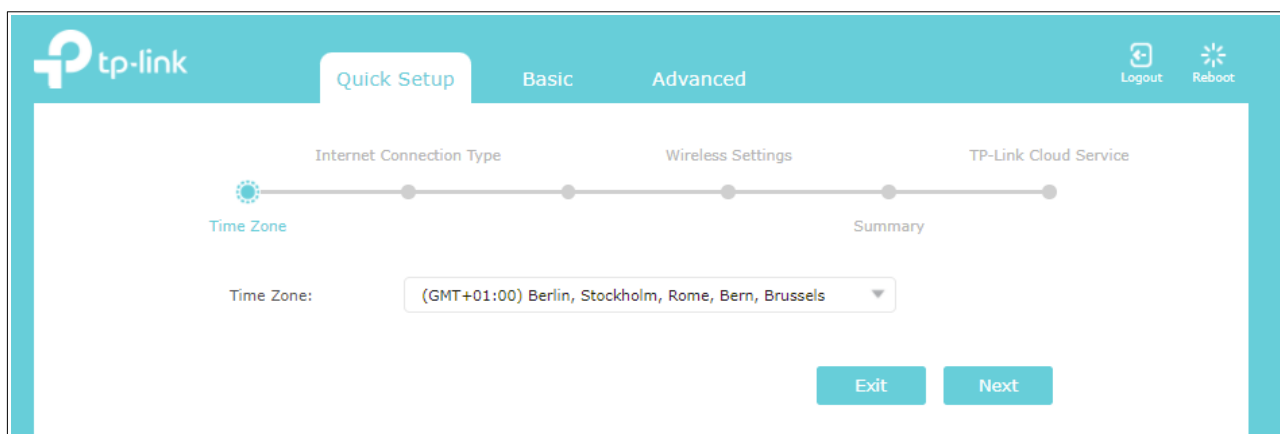

W kroku **Typ połączenia Internetu/Internet Connection Type** należy wybrać opcję **PPPoE** i przejść dalej.


The screenshot shows the TP-Link Quick Setup wizard. The top navigation bar includes the TP-Link logo, the 'Quick Setup' tab (with sub-tabs 'Basic' and 'Advanced'), and 'Logout' and 'Reboot' buttons. A progress bar at the top indicates the current step is 'Internet Connection Type', with other steps being 'Time Zone', 'Wireless Settings', 'Summary', and 'TP-Link Cloud Service'. The main content area contains the instruction: 'Select your connection type. If you're not sure, please click **Auto Detect**.' Below this are several radio button options: 'Auto Detect' (highlighted), 'Dynamic IP', 'Static IP', 'PPPoE' (selected), 'L2TP', 'PPTP', and 'Additional ISP Settings'. A note under 'PPPoE' states: 'Usually for ADSL Modem and you are provided with a PPPoE username and password by your ISP.' At the bottom right, there are 'Back' and 'Next' buttons.

Następnie należy wpisać dane do konta PPPoE, które dołączone są do umowy i przejść dalej.

The screenshot shows the second step of the TP-Link Quick Setup wizard. The top navigation bar is identical to the previous step. The progress bar now shows 'Internet Connection Type' as completed and 'Wireless Settings' as the current step. The main content area contains the instruction: 'Please enter your PPPoE username and password.' Below this are two input fields: 'Username:' and 'Password:'. At the bottom right, there are 'Back' and 'Next' buttons.

Kolejnym krokiem jest konfiguracja sieci bezprzewodowych. Nazwa sieci bezprzewodowej (SSID) oraz hasło (password) nie muszą być zmieniane. Jeśli będą jednak edytowane, należy pamiętać, aby odróżnić je od siebie - na przykład poprzez dodanie końcówki **_5G** na końcu nazwy sieci bezprzewodowej działającej w częstotliwości 5GHz. Hasło do sieci bezprzewodowej może być dowolne, jednak musi zawierać minimum 8 znaków.

Opcja **Inteligentne połączenie/Smart Connect** polega na utworzeniu jednej sieci hybrydowej, która łączy ze sobą częstotliwości 2,4GHz oraz 5GHz. Urządzenie z nią połączone automatycznie wybiera możliwie wyższą częstotliwość.

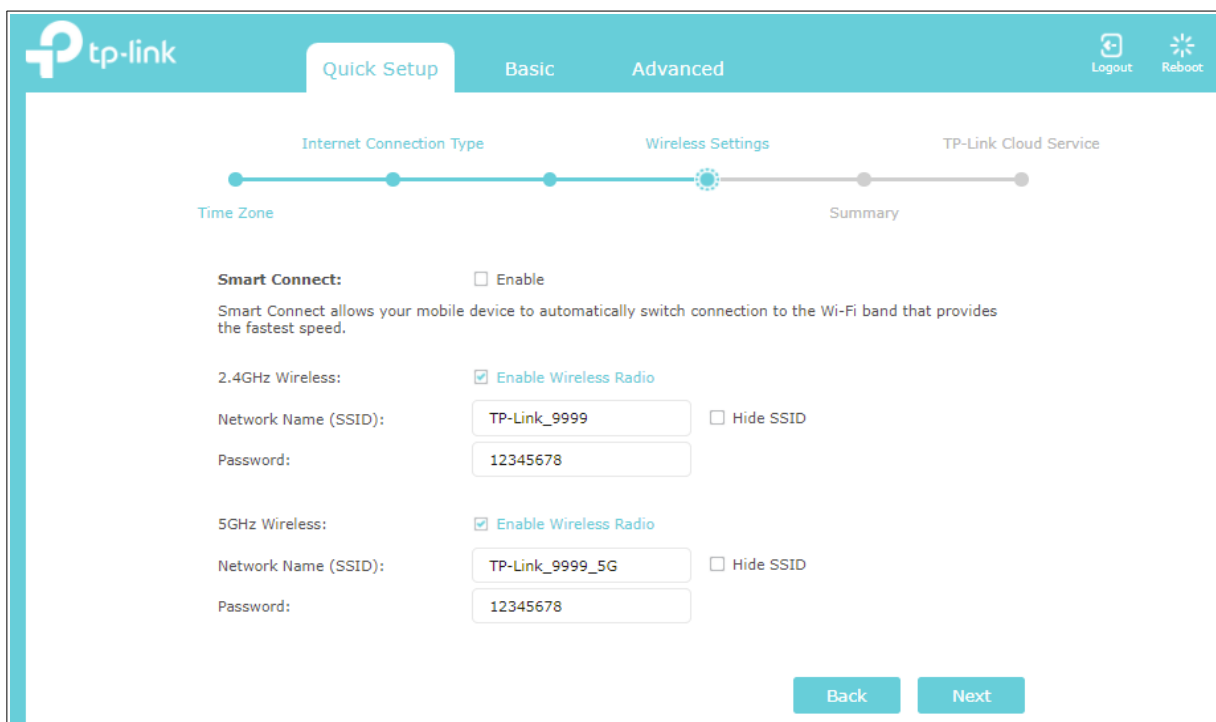


The screenshot shows the TP-Link Quick Setup interface. At the top, there are tabs for 'Quick Setup', 'Basic', and 'Advanced'. The 'Quick Setup' tab is active. Below the tabs, there is a progress bar with five steps: 'Time Zone', 'Internet Connection Type', 'Wireless Settings', 'TP-Link Cloud Service', and 'Summary'. The 'Wireless Settings' step is currently selected and highlighted with a gear icon. Below the progress bar, there are several configuration options:

- Smart Connect:** Enable. Description: Smart Connect allows your mobile device to automatically switch connection to the Wi-Fi band that provides the fastest speed.
- 2.4GHz Wireless:** Enable Wireless Radio. Network Name (SSID): TP-Link_9999. Password: 12345678. Hide SSID.
- 5GHz Wireless:** Enable Wireless Radio. Network Name (SSID): TP-Link_9999_5G. Password: 12345678. Hide SSID.

At the bottom right, there are two buttons: 'Back' and 'Next'.

W końcowym kroku szybkiej konfiguracji widnieje podsumowanie wprowadzonych danych. Należy zapisać je poprzez wciśnięcie przycisku **Zapisz/Save** u dołu ekranu.

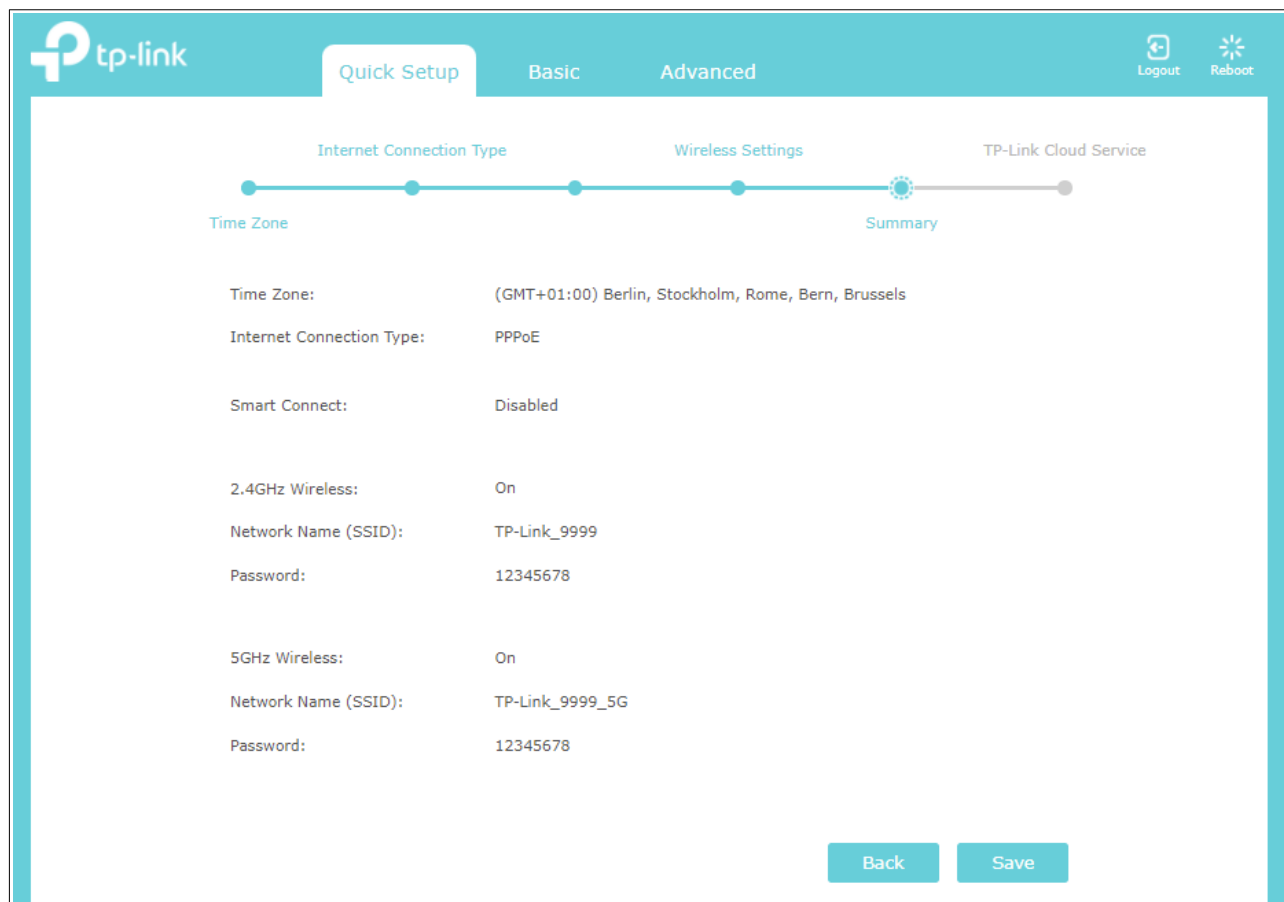

The screenshot displays the TP-Link Quick Setup interface. At the top, there is a teal header with the TP-Link logo on the left and 'Logout' and 'Reboot' icons on the right. Below the header, there are three tabs: 'Quick Setup' (selected), 'Basic', and 'Advanced'. A progress bar at the top indicates the current step: 'Time Zone' (completed), 'Internet Connection Type' (completed), 'Wireless Settings' (completed), 'Summary' (current step, highlighted with a gear icon), and 'TP-Link Cloud Service' (pending). The main content area shows the following configuration details:

Time Zone:	(GMT+01:00) Berlin, Stockholm, Rome, Bern, Brussels
Internet Connection Type:	PPPoE
Smart Connect:	Disabled
2.4GHz Wireless:	On
Network Name (SSID):	TP-Link_9999
Password:	12345678
5GHz Wireless:	On
Network Name (SSID):	TP-Link_9999_5G
Password:	12345678

At the bottom right, there are two buttons: 'Back' and 'Save'.